

FBHA Series
 Chip Ferrite Bead High Current Type
 Size 1812




- Quantity: 1000pcs

APPLICATION

-

Dimensions: [mm]


Land Pattern: [mm]

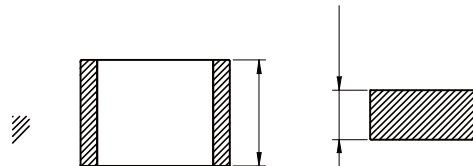

Electrical Properties:

K1 37.058T0 77 8053.84ntri53.844 reff 07 24.3394 37.021.3323 757ntri5nic46tri5nic44 re2023 587.731tri53.c46ti53.c44 reffm(K1 37.0DR17 0 77 4053.84ntri5

Reel Dimension: [mm]

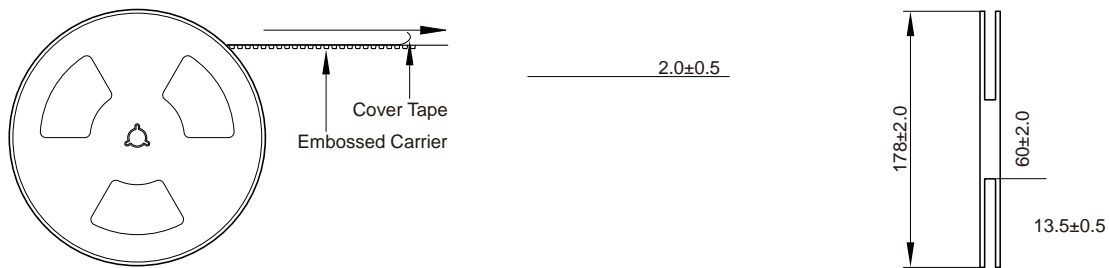

Cautions and Warnings:

Storage Conditions:

- The storage period is within 12 months after the completion of production. Be sure to follow the storage conditions (temperature: -5 to 35°C , humidity: 75% RH Max). If the storage period elapses, the soldering of the terminal electrodes may deteriorate. The warranty period is one year.
- Product should not be exposed to environment with high temperature, high humidity, dust, corrosive gas and etc.
- Products should be handled with care to avoid damage or contamination from perspiration and skin oils.
- Please always handle products carefully to prevent any damage caused by dropping down or inappropriate removing.

Operation Instructions:

- Self heating (temperature increase) occurs when the power is turned ON, so the tolerance should be sufficient for the set thermal design.
- Before soldering, be sure to preheat components. The preheating temperature should be set so that the temperature difference between the solder temperature and chip temperature does not exceed 150°C .
-
-