

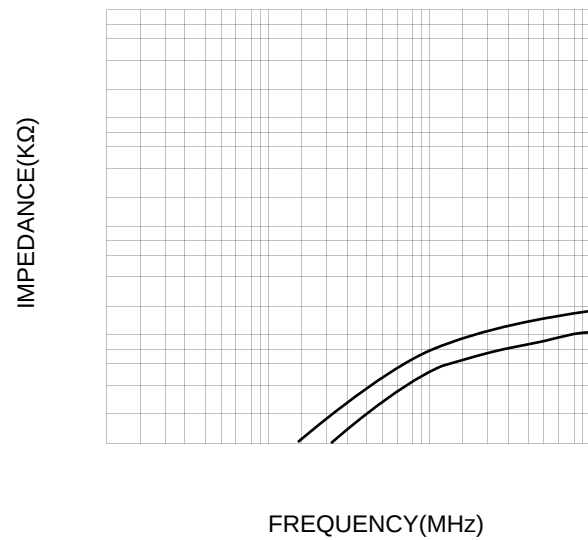


Part No	Inductance (μ H)	Tolerance	Q Min.	Test Frequency (MHz)	SRF Min. (MHz)	DCR Max. (Ω)	Temperature Rise Current Max. (mA)
MI0805-1R2K	1.2	10%	45	10	65	0.5	50
MI0805-1R5K	1.5	10%	45	10	60	0.5	50
MI0805-1R8K	1.8	10%	45	10		0.6	50
MI0805-2R2K	2.2	10%	45	10	50	0.65	30

Operating Temperature: -55 °C ~ +125 °C

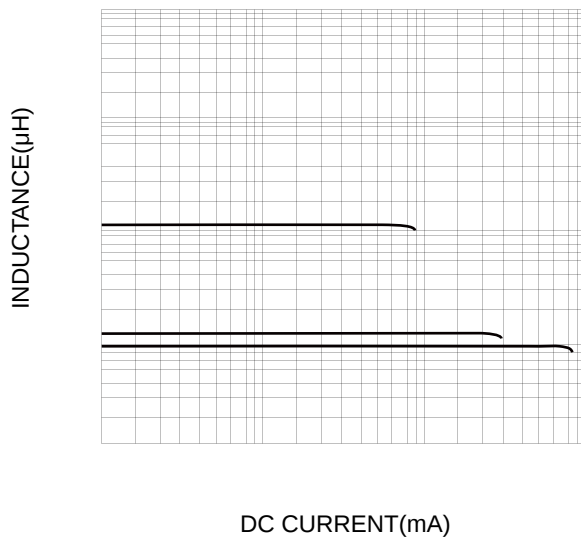


INDUCTANCE(μH)

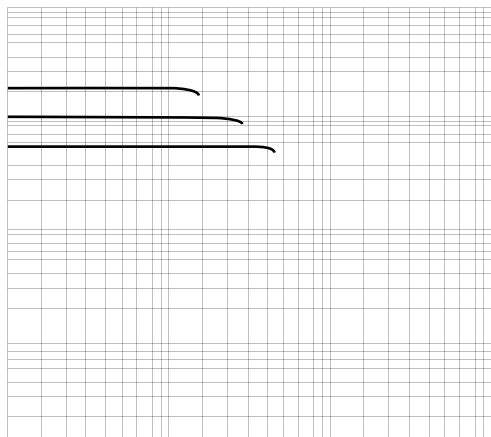

DC CURRENT(mA)

IMPEDANCE($\text{K}\Omega$)

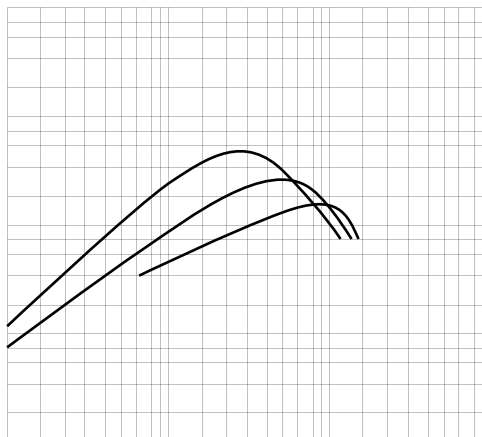

FREQUENCY(MHz)